

MODEL WSS - Discharge Water Separator/Silencer

Burgess-Aarding Discharge Separator/Silencer For Water-Sealed Vacuum Blowers

Description:

Burgess-Aarding centrifugal type water separator/silencers are designed to remove entrained liquid from air in a vacuum system while providing noise reduction.

Features:

- 99% efficient extraction of free liquid
- Up to 10 dB noise reduction
- · Economically priced
- · Long service life

Theory of Operation:

Air flow passes through a separation section where 99% of the free liquid is extracted centrifugally.

Specifications:

Extraction Efficiency: 99% of Free Liquid

Noise Reduction: Up to 10 dB

Maximum Operating

Pressure:

10 psig

Typical Sizes: 1" - 30"

Larger Sizes Available

Upon Request

Standard End NPT or 125# ANSI

Connections: Flanged

Standard Material Carbon Steel

of Construction: Other Materials Available


Upon Request


Finish: Prime Coated

Exterior

Burgess-Aarding model WSS water separator





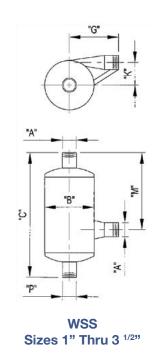

"A"
"B"
"B"
"A"
WSS

WSS Sizes 4" and larger

Dimensions in inches Estimated Catalog Weight in lbs. Number Α В С G Κ М Р WSS-1 2 3/32 8 3/4 1 4 1/2 14 6 1 10 WSS-1.25 1 1/4 4 1/2 14 6 2 1/16 8 10 1 WSS-1.5 1 1/2 6 17 7 2 3/4 10 1 1/2 15 WSS-2 2 8 22 9 3 11/16 13 2 25 WSS-2.5 4 5/8 2 2 1/2 10 24 10 14 35 WSS-3 3 10 27 11 4 9/16 16 2 1/2 50 WSS-3.5 3 1/2 12 12 5 1/2 18 2 1/2 60 30 WSS-4 4 12 29 13 1/2 5 7/16 18 1/2 3 85 WSS-5 5 16 14 1/2 7 5/16 21 1/2 130 35 3 WSS-6 6 18 42 18 8 3/16 27 3 175 WSS-8 8 22 21 1/2 9 15/16 285 52 32 3 WSS-10 10 24 56 26 10 11/16 32 3 440 WSS-12 30 69 31 1/2 13 7/16 40 1/2 4 685 12 WSS-14 16 1/4 14 36 75 36 1/2 43 1390 4 WSS-16 16 42 88 41 1/2 18 7/8 52 1860

NOTES: -Flanges are drilled to match 125 lb. American Standard Flanges

⁻Larger units available upon request

⁻Specifications subject to change without notice