BUSCH JET*STAR™

Strip Coolers For The Metals Industry



Strip Cooling System featuring high efficiency, uniform heat transfer and stable operation

he Busch JET*STAR Strip Cooling System is the most efficient method yet devised to air cool moving strip in the metals industry. JET*STAR technology utilizes a unique combination of sophisticated aerodynamic and thermodynamic principles. Its patented technology enables JET*STAR to cool heavier gauge strip at higher strip speeds while requiring less energy and space than older methods. The many advantages of JET*STAR are applicable to all types of process lines including those used for Galvanizing after pot cooling, minimize pre-cooling; Anneal and Pickle air quench after annealing furnace, cooling before rinse tank; Silicone Line post furnace cooling before coater.


The thermal efficiency of **JET*****STAR** is increased through a substantial reduction of thermal contamination, crossflow, and reentrainment of spent air. In retrofit applications, this increased efficiency often permits either a reduction in length of the cooling zone or a lower strip outlet temperature.

Another important benefit of the JET *STAR system is the reduction of aerodynamically induced strip instability (flutter). By putting the strip into an aerodynamically produced force field, strip stabilization is controlled and strip flutter problems are eliminated or substantially decreased.

Busch International has developed a proprietary computer-based methodology for selection of the proper JET*STAR configuration for each application. The database for this program was developed after several years of laboratory testing using equipment that closely simulates field conditions. Extensive verification of actual results was performed with operating JET*STAR systems.


DESIGN AND CONSTRUCTION

The JET*STAR Strip Cooling System is custom designed to meet site requirements. Capacity, unit arrangement and dimensions, number of nozzles, materials of construction and wiring can be modified to meet individual user specifications. Unit pre-assembly assures simplified installation and proper operation.

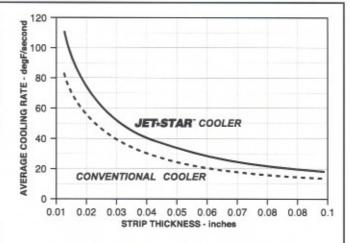

STRIP COOLER PERFORMANCE CHART

Average cooling rate versus strip thickness for 260°F temperature drop with G90 coating through 20- foot long cooling zone.

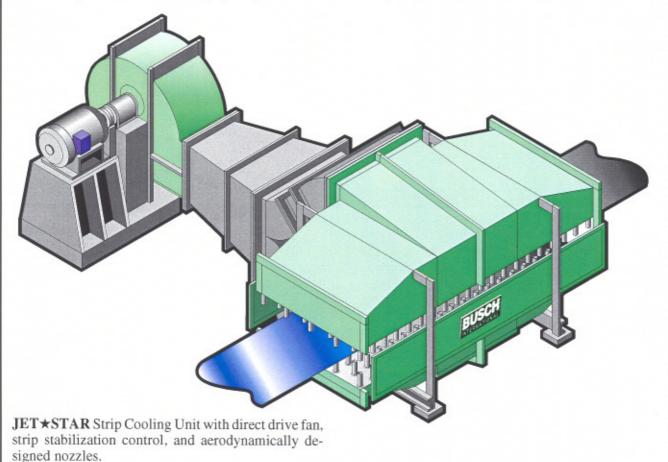

ACCESSORIES AND OPTIONS

- · Variable speed drives
- · Alternate paint systems
- · Horizontal or vertical arrangement
- · Support steel and platforms
- · Vaneaxial fans
- Thermal or sound insulation
- Filters for outside air
- Temperature controls
- Crane for mini-spangle operation
- · Heaters for strip drying applications



A CECO Environmental Company

10431 Perry Highway • Wexford, PA 15090 Phone: 724.940.2326 • Fax: 724.940.4140 busch@cecoenviro.com