

KB Duct

A CECO Environmental Brand

KB Clamp Together Duct
Provides You With...

Infinite Adjustability

Superior Clamping and
Fast Installation

Two key methods of adjustment

Quickly make infinite adjustments to fit any length of space between fittings

- Use 11" long adjustable sleeve for longer lengths
- Use adjustable collar for critical short adjustments

Superior clamping

The KB Duct Forever Clamp is designed for quick, secure, repetitive-use

- Heavy duty 'winged' O-ring gasket provides tight compression around the rolled lips* of the duct
- All welded and stainless steel construction means that the clamp will perform time after time...FOREVER...**Guaranteed.**

50-70% labor time
savings compared
to spiral

Ask for **FREE
QUOTE & lead
time TODAY!**

All welded
stainless
steel clamp
and frame

Variety of
gaskets
available

2" adjustment
on every fitting

Fully
welded
seams

Contoured
design for
superior
clamping

Winged O-ring
for tight
compression fit

Other Features & Benefits

- **Fully welded seams:** All laterals, branches and "Y" fittings are welded and sealed
- **Adjustability within all elbows:** 2" of adjustability in all elbows and laterals
- **Custom fabrication:** Hoods, transitions, square to round, and more
- **304 and 316 Stainless Steel** and galvanized materials of construction **up to 10 gauge**

*ALL components required to assemble a dust collection system up to 24" dia. quickly and efficiently are available with the rolled lip. You can even adapt your current system, regardless of the style of duct, to the rolled lip system. Contact us to find out how.

Infinite Adjustability

Two Methods of Adjusting and Fast Installation

Now you can make the infinite adjustments to fit any length requirement. The 11" long adjustable sleeve is recommended for longer lengths, and the adjustable collar on the fittings are for the critical short adjustment between fittings.




1 Measure length needed.



2 Mark standard 5' duct 3-4" shorter than length needed.



3 Use O-ring (comes with sleeve) to mark cut line. Cut.

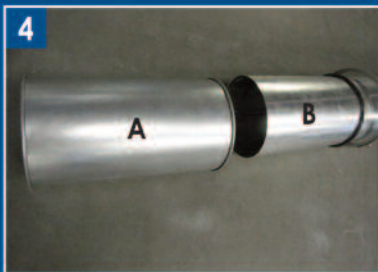

4 Debur cut and slide sleeve (A) over cut end of pipe (B).



5 Adjust to length.



6 Clamp ends of assembly and then clamp O-ring to sleeve.



The exclusive adjustability of the fittings makes KB Duct the ONLY clamp-together duct that is infinitely adjustable. All fittings (elbows, branches, reducers... anything with a collar) will accept a cut piece of pipe just the same as a sleeve. To use this feature follow the directions above, but cut the pipe a little longer than needed. Slide the cut pipe into the fitting and clamp the O-ring (must be ordered separately) to the fitting. This feature is especially useful when the distance needed is less than the length of the sleeve (11"). In that instance, even the sleeve alone would be too long.