

# KB Duct

A CECO Environmental Brand

Size In.	Std OD In.	Std ID In.	Rolled Edge (nom. in.)	Std Length In.	Std Weight Lbs	Part #	Std. Ga.	Optional Gauge
3	2.97	2.92	.21	60.13	3.45	10003	26	16, 11
4	3.87	3.82	.21	59.50	5.03	10004	24	24,22,20,16,11
5	4.84	4.84	.21	59.50	6.65	10005	24	24, 22, 20, 16, 11
6	5.87	5.82	.21	57.62	7.85	10006	24	24, 22, 20, 16, 11
7	6.88	6.83	.30	59.25	11.06	10007	22	up to 14 Ga.
8	7.86	7.81	.30	59.62	13.01	10008	22	up to 12 Ga.
9	8.58	8.80	.30	59.62	14.07	10009	22	up to 10 Ga.
10	9.92	9.87	.30	59.25	16.45	10010	22	up to 10 Ga.
11	10.96	10.92	.30	58.87	17.01	10011	22	up to 10 Ga.
12	11.98	11.93	.35	58.87	19.09	10012	22	up to 10 Ga.
13	13.03	12.96	.35	58.81	25.08	10013	20	up to 10 Ga.
14	13.97	13.90	.35	58.94	27.06	10014	20	up to 10 Ga.
15	14.99	14.92	.35	58.69	29.55	10015	20	up to 10 Ga.
16	15.96	15.89	.35	58.87	31.05	10016	20	up to 10 Ga.
17	16.96	16.89	.35	58.69	33.55	10017	20	up to 10 Ga.
18	17.99	17.92	.35	59.00	35.06	10018	20	up to 10 Ga.
19	18.97	18.90	.35	58.75	37.55	10019	20	up to 10 Ga.
20	19.94	19.89	.35	58.75	39.55	10020	20	up to 10 Ga.
22	21.93	21.86	.35	58.75	43.06	10022	20	up to 10 Ga.
24	23.86	23.79	.35	64.50	53.01	10024	20	up to 10 Ga.

**\*Even number gauges only available**

**\*\*16 gauge is standard for 3" Stainless Steel**

**Seam:**

Standard longitudinal seam is Acme locked. Plasma weld seam also available

HEAVY Gauge Duct is constructed with a welded seam and a standard gauge rolled lip "collar" is welded flush over the end.


**If using Stainless Steel add an "SS" to the end of the part #.**

## Clamp Together Duct

Standard 5' Lengths



**Standard lock seam duct. Plasma weld seams available.**

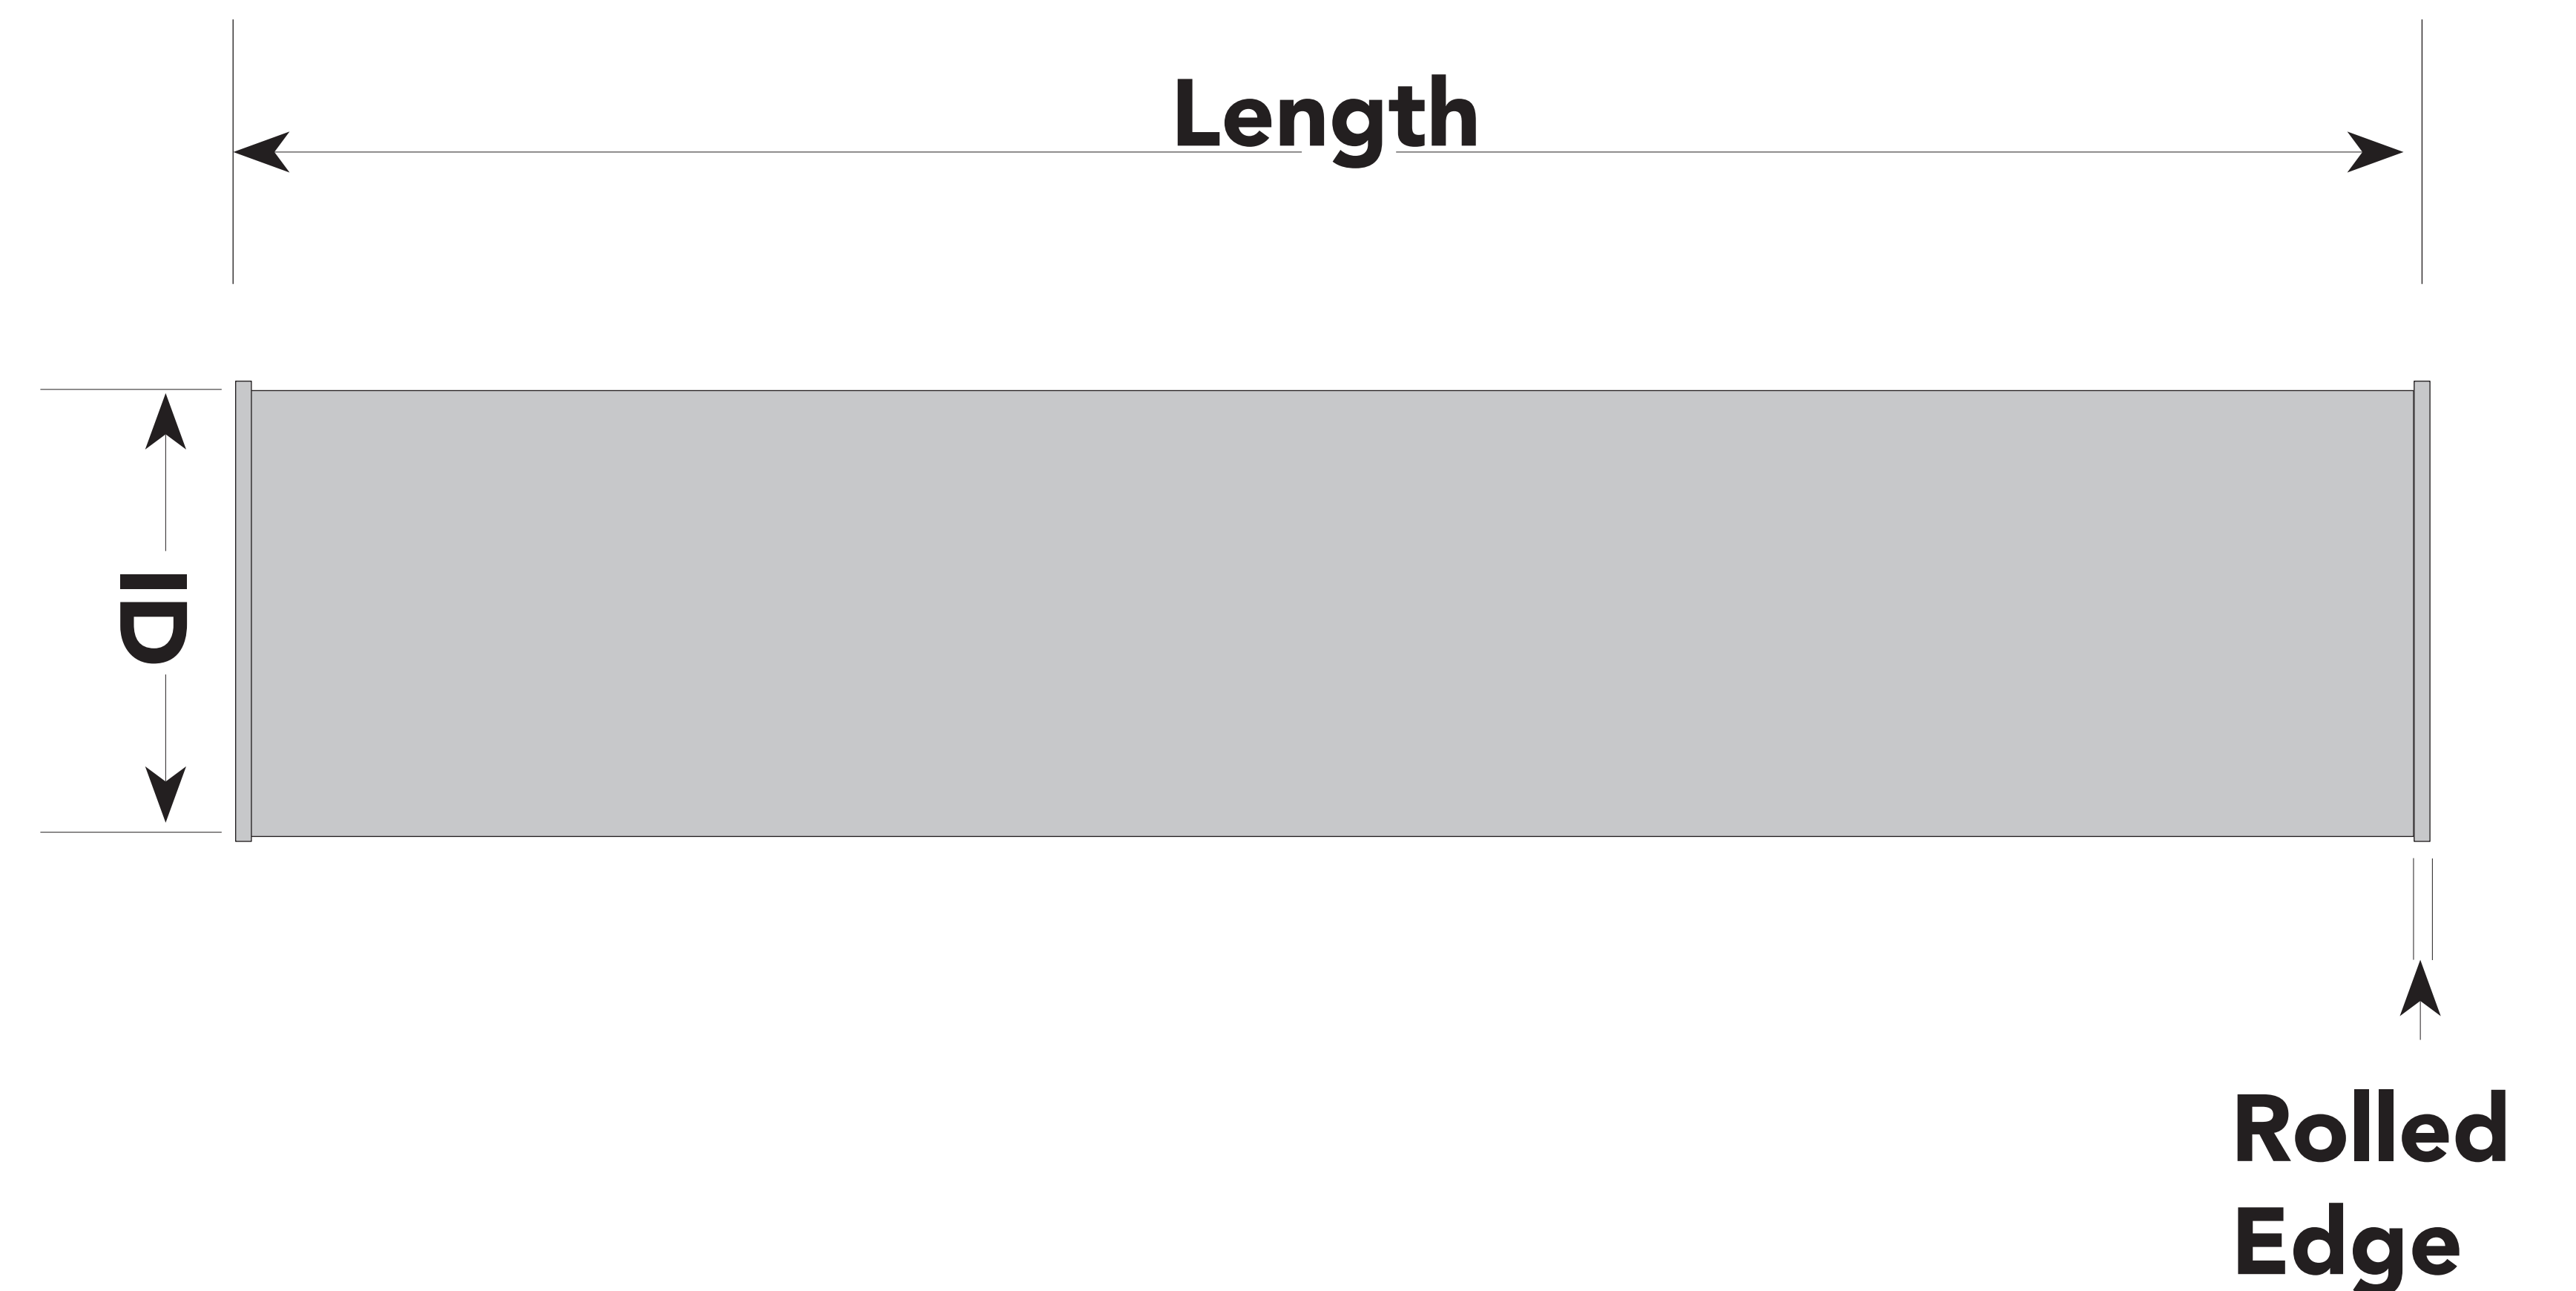

**Materials Available: Galvanized, 304SS, 316SS, Carbon Steel, Galvanneal**